

Suitability for outdoor use of different combinations between polyurethane Decorall System® Powder coatings and heat transfer film Decorall System® must be assessed on www.decorall-system.com. (link: **TESTED FOR OUTDOOR USE**) or contacting our laboratory.

CHOCOLATE



Powder Coating: 8G-096-A009 + Heat Transfer Film: 2504/12



Powder Coating: 8G-096-A009 + Heat Transfer Film: 2120/03



Powder Coating: 8G-096-A009 + Heat Transfer Film: 2501/02



Powder Coating: 8G-096-A009 + Heat Transfer Film: 2117/03

L'idoneità all'impiego in esterno degli abbinamenti tra prodotti vernicianti poliuretani Decorall System® e film sublimatici Decorall System® dovrà essere valutata sul sito internet www.decorall-system.com (alla voce **FINITURE ADATTE PER USO ESTERNO**) oppure contattando il nostro laboratorio.

Test Report:
Accelerated
Weathering Test

Decoral LAB
Research and Development

02

Laboratory Test

No. **523**

Device: QSun 3000

Total duration: 1098 h



LAB. ID NUMBER: 43418
POWDER COATING: 8G-096-A009
HEAT TRANSFER FILM: 2501/02
Colour Variation (ΔE): 1,45
residual gloss: 72%

Technical Remarks
Good residual gloss and low colour variation (ΔE), after 1098 hours.

Technical Opinion:
Suitable for OUTDOOR USE

Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers. However, the resistance against accelerated weathering test is only one of the conditions necessary for the evaluation of the resistance of the finished product. For a final assessment see further analysis on natural exposure in Florida.

Mod_TR_01_rev03 Laboratory Decoral System Date: 21/01/2020 ID Report: TR-IA-02-2020

Test Report:
Accelerated
Weathering Test

Decoral LAB
Research and Development


01

Laboratory Test

No. **542**

Device: QSun 3000

Total duration: 1053 h

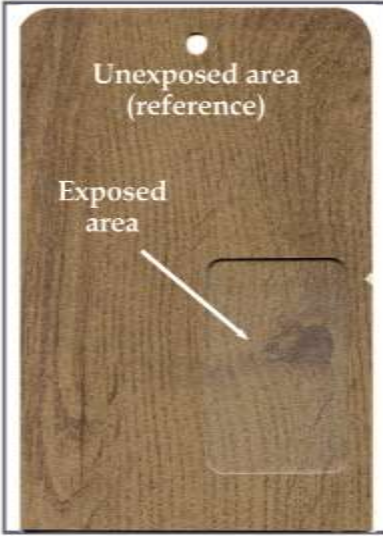

LAB. ID NUMBER: 44634
POWDER COATING: 8G-096-A009
HEAT TRANSFER FILM: 2504/12
Colour Variation (ΔE): 0,65
residual gloss: 84%

Technical Remarks
Excellent residual gloss and low colour variation (ΔE), after 1053 hours.

Technical Opinion:
Suitable for OUTDOOR USE

Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers. However, the resistance against accelerated weathering test is only one of the conditions necessary for the evaluation of the resistance of the finished product. For a final assessment see further analysis on natural exposure in Florida.

Mod_TR_01_rev03 Laboratory Decoral System Date: 21/01/2020 ID Report: TR-IA-01-2020

Test Report:
Accelerated
Weathering Test

Decoral LAB
Research and Development


111

Laboratory Test

No. **472**

Device: Sol 3000RH

Total duration: 1170 h

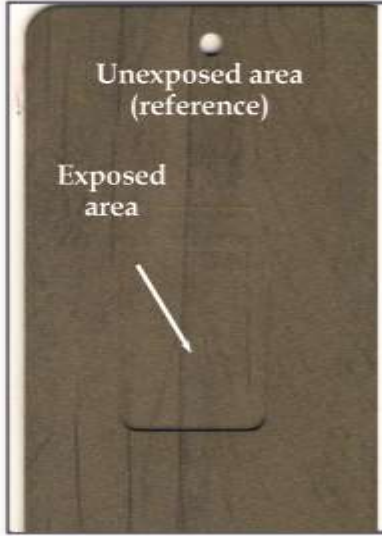

LAB. ID NUMBER: 40747
POWDER COATING: 8G-096-A009
HEAT TRANSFER FILM: 2120/03
Colour Variation (ΔE): 0,57
residual gloss: 87%

Technical Remarks
Good residual gloss and low colour variation (ΔE), after 1170 hours.

Technical Opinion:
Suitable for OUTDOOR USE

Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers. However, the resistance against accelerated weathering test is only one of the conditions necessary for the evaluation of the resistance of the finished product. For a final assessment see further analysis on natural exposure in Florida.

Mod_TR_01_rev03 Laboratory Decoral System Date: 05/12/2016 ID Report: TR-IA-111-2016